

FACT SHEET FSMO-47HBVP



The perfect portrait outdoor housing for your 47 inch high brightness 2000 NIT flat panel.

The housing is specially designed to protect and brand the 2000 nit screens in outdoor applications. The unique and modern design allow it to be installed in almost any environment.

The light weight housing is standard equipped with a hardened glass front secured by two hidden locks. Standard equipped with thermostatically controlled heating and extra ventilation and extra filters.

- Perfect monitor service access
- Standard supplied with service mode of the screen
- ▲ Modern design
- Durable build
- ▲ Easy installation










FACT SHEET

FSMO-47HBVP

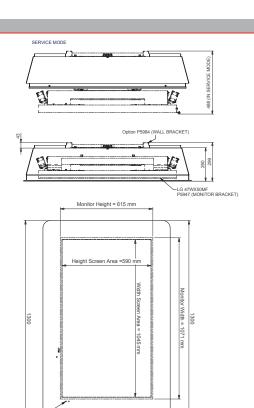


This housing is supplied with extra ventilation, an forced airflow in front of the screen is created to remove warm air.

Because of the extra ventilation for fresh air inlet, the housing is supplied with extra filters. Therefore only clean air will entry the housing.











Technical specifications

LIR/BRIGHTNESS SENSOR

Suitable for LG-47WX50MF

Screen size 47 inch

Dimensions W845 x H1300 x D260 Max. screen dimensions W615 x H1071 x D157

Screen orientation Portrait
Service mode 188 mm
Standard colour Bezel: Black
Housing: White

Other colours available on request

Glass specifications: Hardened safety glass

Supplied with UV filter

Supplied with black coated bezel

IR and Brightness sensor are accessible

Optional

Wall mount

Touch foil, for interactive applications Logo stickers, for corporate identity

Related products

FSMO-47HBV, Landscape orientated housing