

FACT SHEET LSS-BOOMERANG



Design sound solutions for public places

The LLS-Boomerang offers an elegant solution for placing speakers on columns and corners in public areas. With the Boomerang, the speakers are visually less obtrusive. This unique angled speaker can be mounted around the corner of a wall or to a square or round column. The Boomerang is a speaker unit with multiple driver system and has therefore a wide beam width.

With two Boomerang speakers, the entire column is surrounded and there is sound on all four sides, with the advantage that there are not four but only two systems are required. In addition, the Boomerang is custom available to the width of the column or diameter.


With the optional 100 Volt transformer, the Boomerang's are also usefull in 100 Volt installations.

- ▲ Elegant solution for audio in public places
- ▲ Custom made to width/diameter column possible
- Colour: Anodized aluminium with black or white speaker front
- ▲ 2 x 30 Watt RMS at 8 Ohm
- Easy installation with provided wall mounts







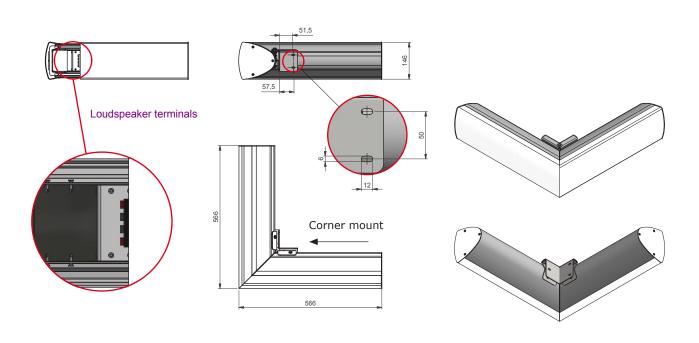

Technical specifications

Dimensions in mm $\,$ W 566 x H 566 x D 146

Custom model available on

request

Max. power 2 x 30 Watt RMS at 8 Ohm

Frequency 70 Hz - 20 KHz

Connection Wire connect with internal

connector

Colour Anodized aluminium with black

or white speaker front

Wall mount Included

Optional

Stereo mini amplifier

Ref. 491004

Max. power 2×15 Watt bij 4 Ohm $/ 2 \times 8$ Watt bij 8 Ohm

100 Volt transformer

Ref. 491019