



Top view


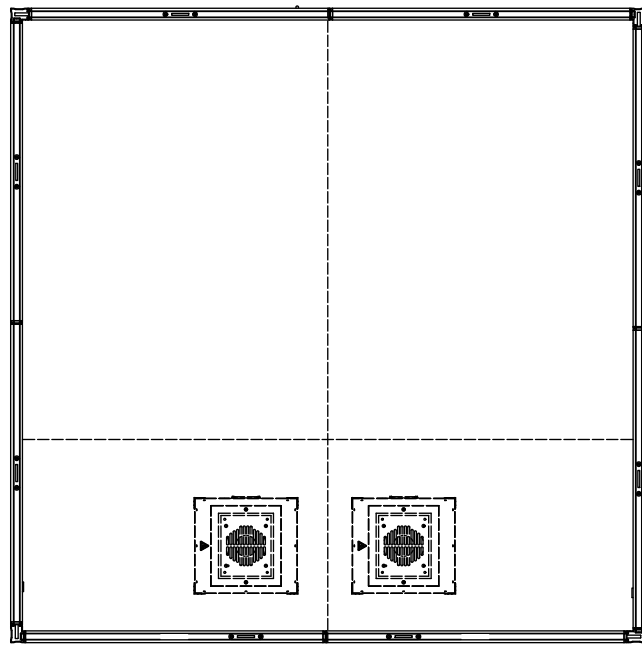


Ventilation pod

Front view

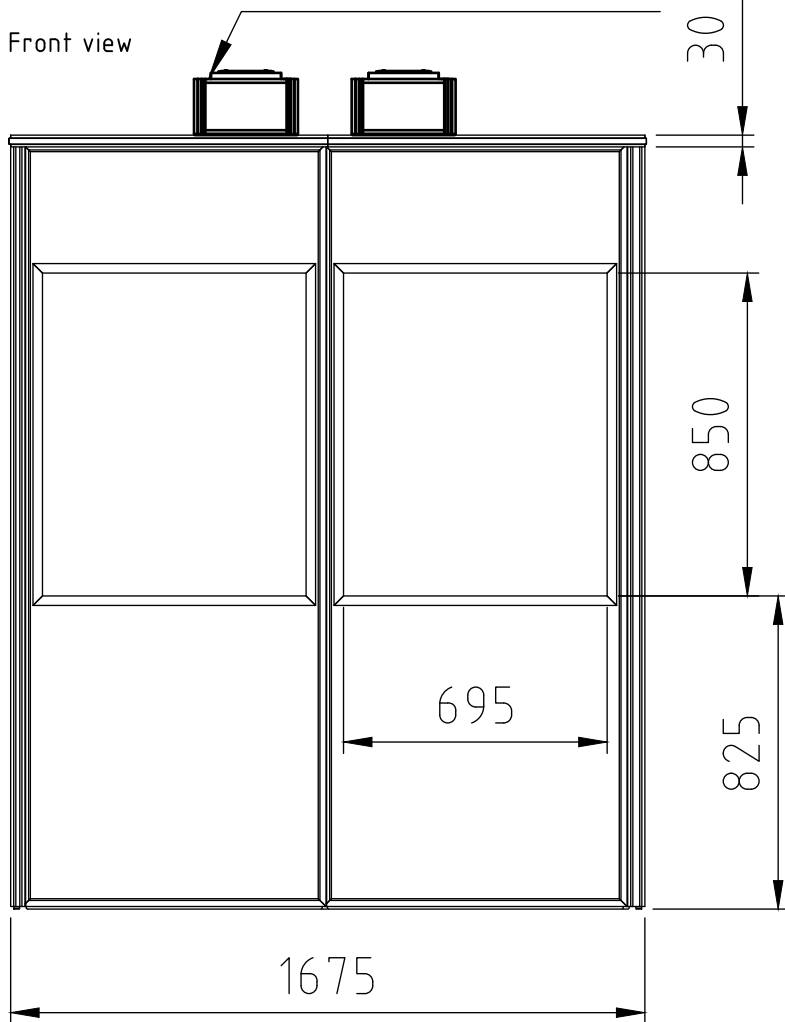


Side view

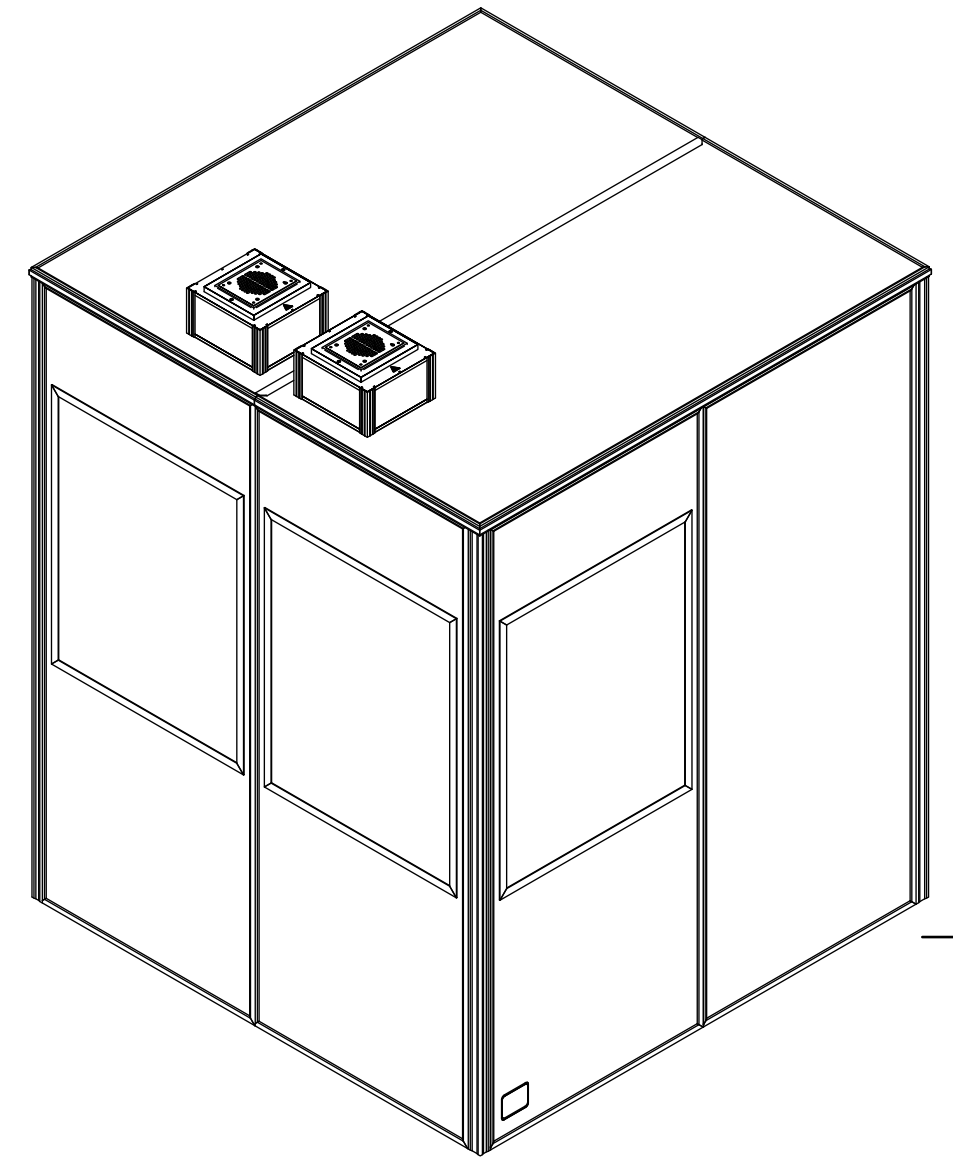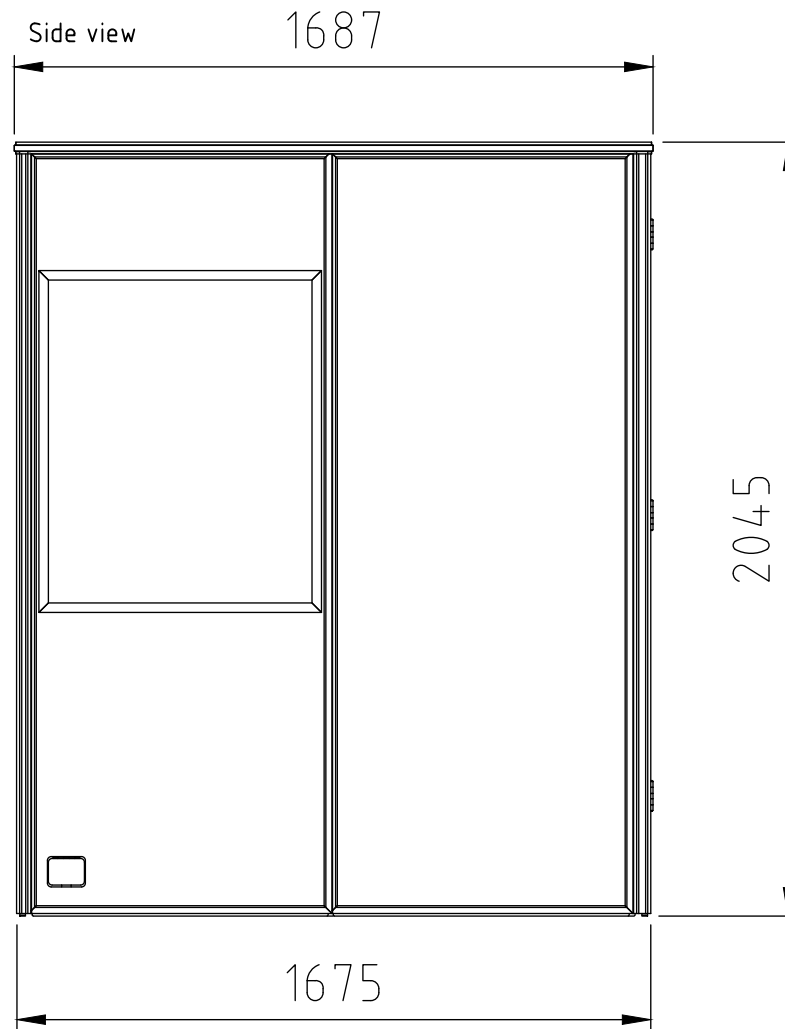

The access door can be placed on any side of the booth. Default position is at the back.

Standard components:

- 2 window panels
- 2 window panel with cable hatch
- 3 blind panels (1 with coat hanger)
- 1 door panel
- 2 roof panel
- 1 acoustic table
- 1 assembly alan key
- 2 ventilation units
- 4 corner posts

 <p><b>AUDIPACK</b> Industriestraat 2 2751 GT Moerkapelle The Netherlands tel. +31(0)795931671 fax. +31(0)795933115 www.Audipack.com</p> <p><small>© COPYRIGHT AUDIPACK This print and the information shown thereon, is the property of AUDIPACK. It may not be delivered to others nor reproduced for general circulation without the written consent of the AUDIPACK engineering department</small></p>	<p>Material: Treatment:</p>	<p>TOLERANCES, UNLESS NOTED OTHERWISE: ISO 2768-m</p>
	<p>Drawn by: <b>JR. vd Berg</b> Date: <b>11-03-2019</b></p> <p>Checked by: Appr. by:</p>	<p>Name: <b>JR. vd Berg</b> Date: <b>11-03-2019</b></p> <p>Scale: <b>1:30</b> Format: <b>A4'</b></p>
<p>Description: <b>Silent 9600 interpreter booth</b> 2 persons</p>		<p>Part Number: <b>P4601</b></p>