

1

2


3

4

5

6

Top view

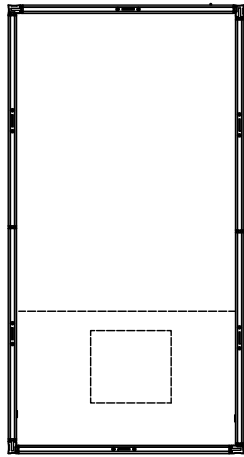

The access door can be placed on any side of the booth.  
Default position is at the back.

Standard components:

- 1 window panel
- 2 window panels with cable hatch
- 1 blind panel
- 1 blind panel with coat hanger
- 1 door panel
- 1 roof panel
- 1 Table
- 1 Assembly alan key
- 1 ventilation unit with LED dimmer

A


B

A

B

Front view

890

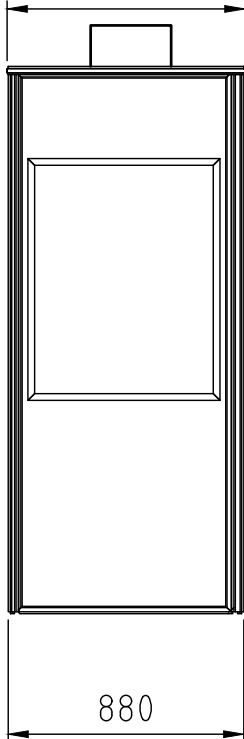

880

C

D


C

D

175

Side view

1687

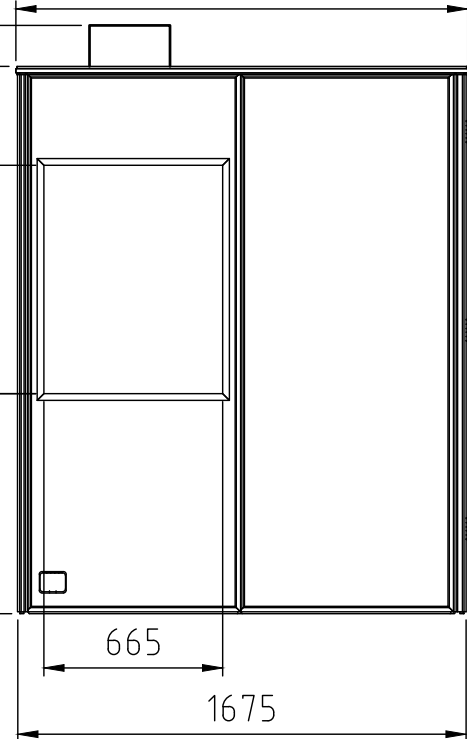


850


823

665

1675

2045

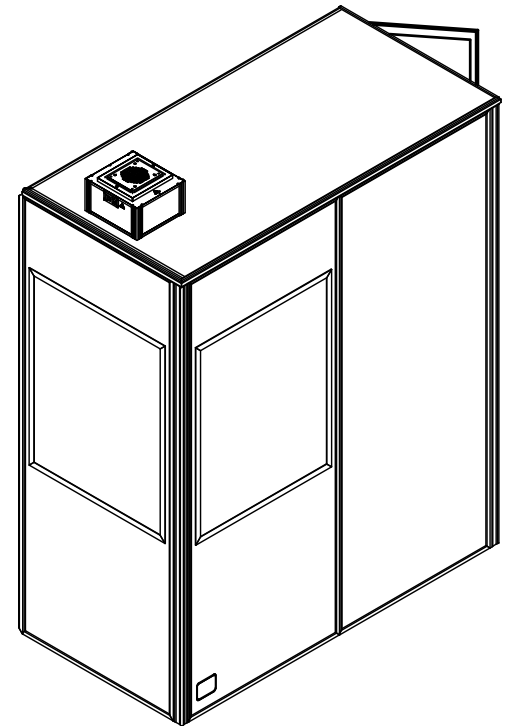

 <b>AUDIPACK</b> Industriestraat 2 2251 GT Hoerhaghele The Netherlands tel. +31(0)795931671 fax. +31(0)795933115 www.audipack.com	Material: Treatment:	TOLERANCES, UNLESS NOTED OTHERWISE: ISO 2768-m
	Drawn by: <b>JR. vd Berg</b> Checked by: Appr. by:	Date: <b>24-02-2023</b> Scale: <b>1:30</b> Format: <b>A4</b>
© COPYRIGHT AUDIPACK This print and the information shown thereon, is the property of AUDIPACK. If any part is delivered to others nor reproduced for general circulation without the written consent of the AUDIPACK engineering department.	Description: <b>Silent 9600 interpreter booth</b> 1 person	Part Number: <b>P220452</b>

1

2

3

4

5

6

Drawing